

600x1200mm

THE BEAUTY OF FEELING AT HOME

Our idea of creativity and color

interior designer with a profound love of colors, their expressive, vital force, and above all their incomparable ability to make any environment bright and dynamic, more than any other element. I have combined creativity and color in a single, xquisite collection for new and decidedly original cladding solutions. lam's seamless decors extend like wallpaper, but with all the advantages of the thinnest ceramic slabs in the world, light and resistant, a powerful means of expression to renew wall surfaces and transform them into scenic surfaces which are practical and safe.



A magnetic elegance combines realism and aesthetic perfection

Warm shades and bright notes for a new laminated porcelain stoneware collection inspired by handcrafted metals in which attractive oxidation effects created by the passing of time produce five vibrant changing colors. An authentic and high-performance interpretation of the material for large-format surfaces with a thickness of just 3.5 mm that offer new solutions for contemporary living thanks to their superior technical and stylistic qualities.





STORY ABOUT AS

We're honoured to be identified as one of the leading tile manufacturers in Morbi. We Have been officially recognised. We have been making PGVT tiles in the Gujarat Morbi region for over a decade now.

We are highly skilled in the creation of GVT and PGVT tiles, as well as their marketing and assembly, using cutting-edge, original technology. We makes amazing finishing tiles.

500x1200mm



LUMINOUS TALES IMBUED WITH RIGOUR AND FRESH AUTHENTICITY

eye-catching thanks to its attractive metallic effects that retain and reflect light, lending brightness to ceramic surfaces designed for indoor and outdoor spaces.

A reinterpretation of the metal material with a focus on research and experimentation, a bright and natural finish that reveals all its expressive power in large laminated porcelain stoneware slabs, perfect for innovative projects and accessories with a sophisticated design.



WATER ABSORPTION



MODULUS OF RUPTURE



DEEP ABRASION RESISTANCE



LINEAR THERMAL EXPANSION



STAIN RESISTANCE



CHEMICAL RESISTANCE



FROST RESISTANCE









AMBER

PGVT

600X1200MM

SURFACE GLOSSY/MATT

















BLACK

PGVT

600X1200MM

000/(1200)*||*

SURFACE GLOSSY/MATT


FINISH
SUPER HIGH GLOSS









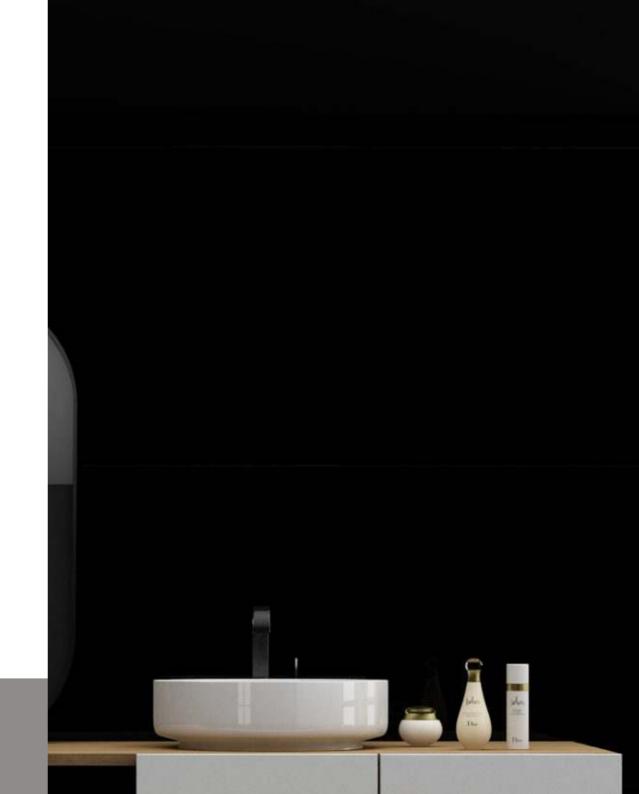





CARAMEL

PGVT

600X1200MM


SURFACE GLOSSY/MATT










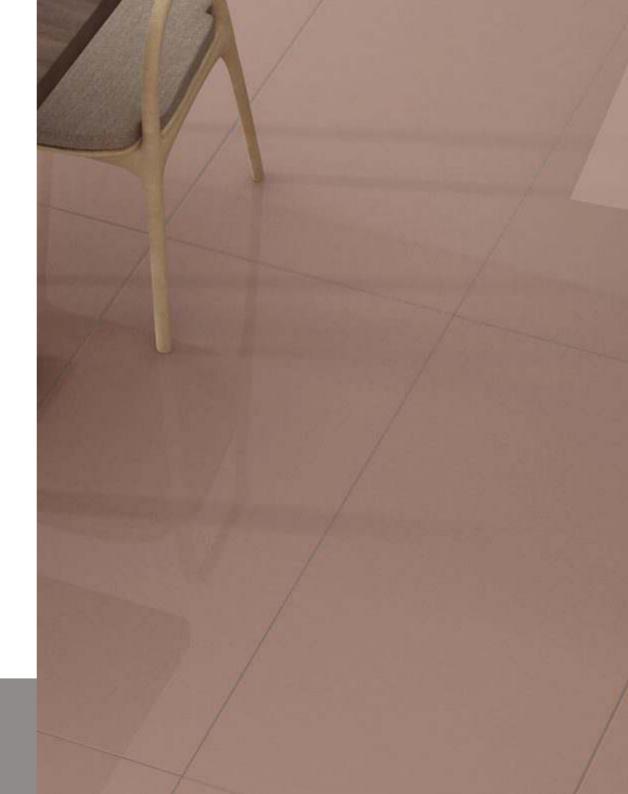

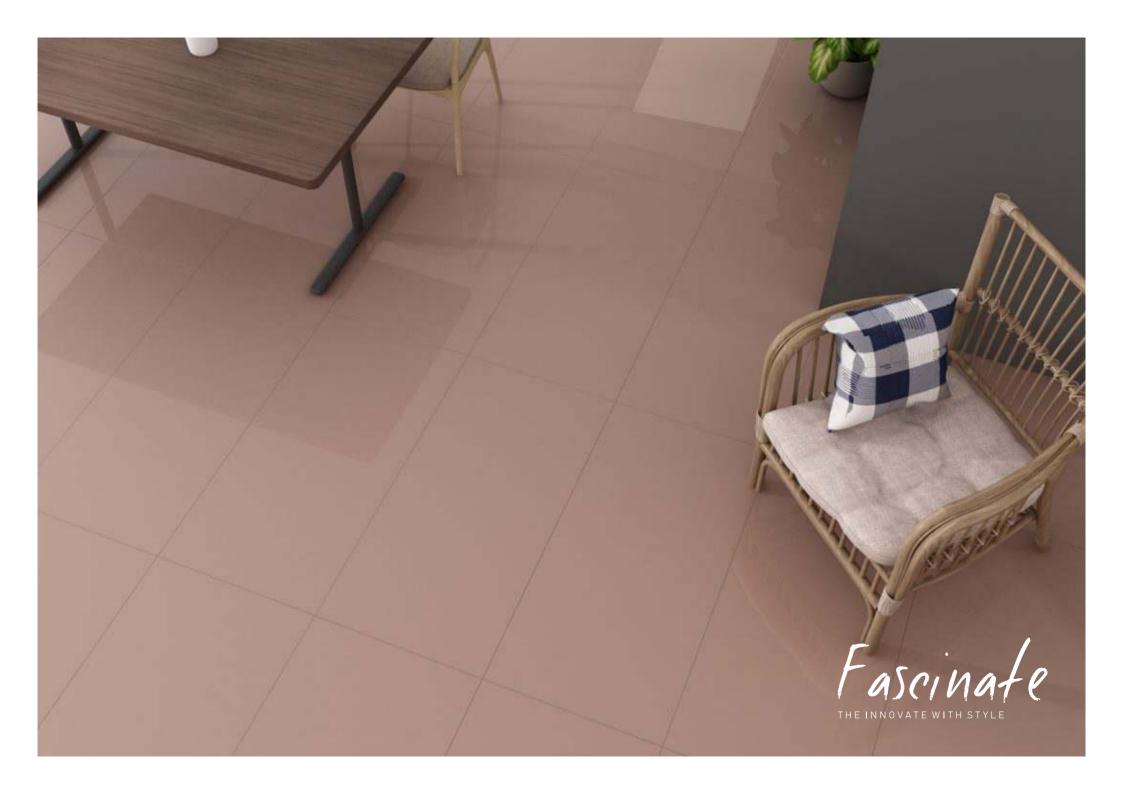



CARBON GRAY



PGVT

600X1200MM

SURFACE GLOSSY/MATT















GRENITE GRAY



PGVT

600X1200MM

SURFACE GLOSSY/MATT















LIGHT GREEN



PGVT

600X1200MM

SURFACE GLOSSY/MATT















SKY

PGVT

600X1200MM

SURFACE GLOSSY/MATT












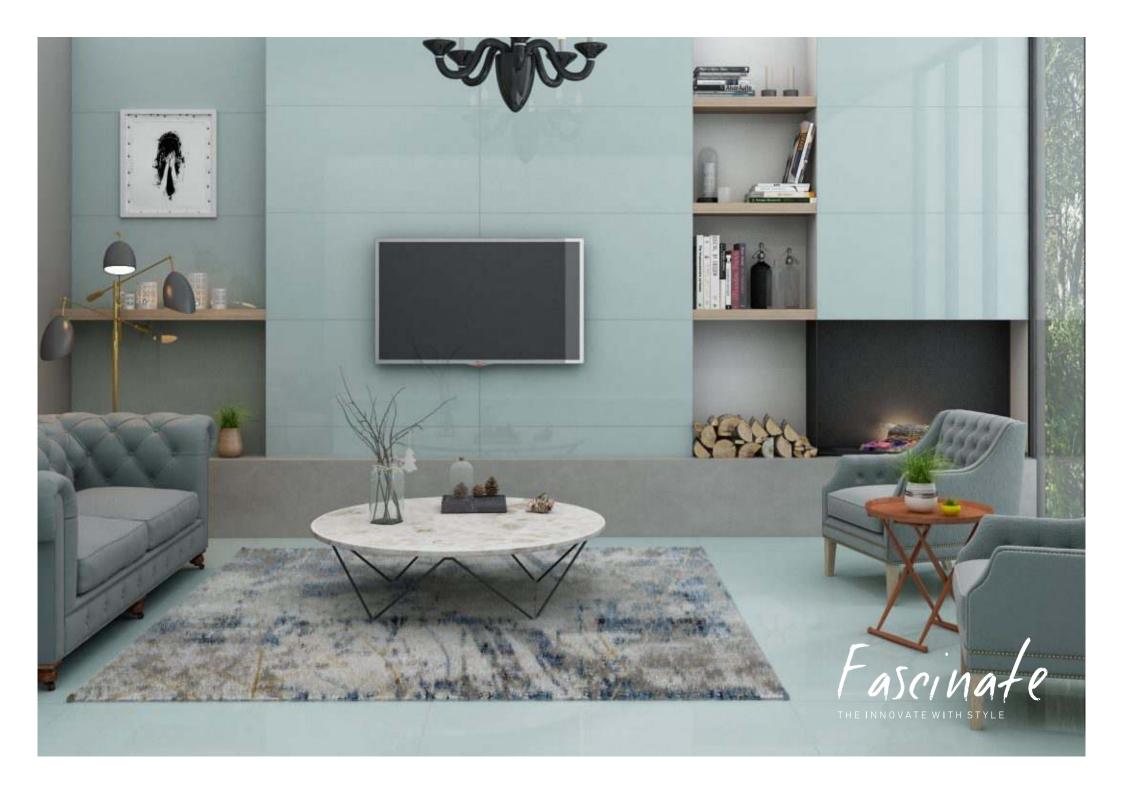



SUPER WHITE



PGVT

600X1200MM

SURFACE GLOSSY/MATT

















PGVT

600X1200MM

SURFACE GLOSSY/MATT












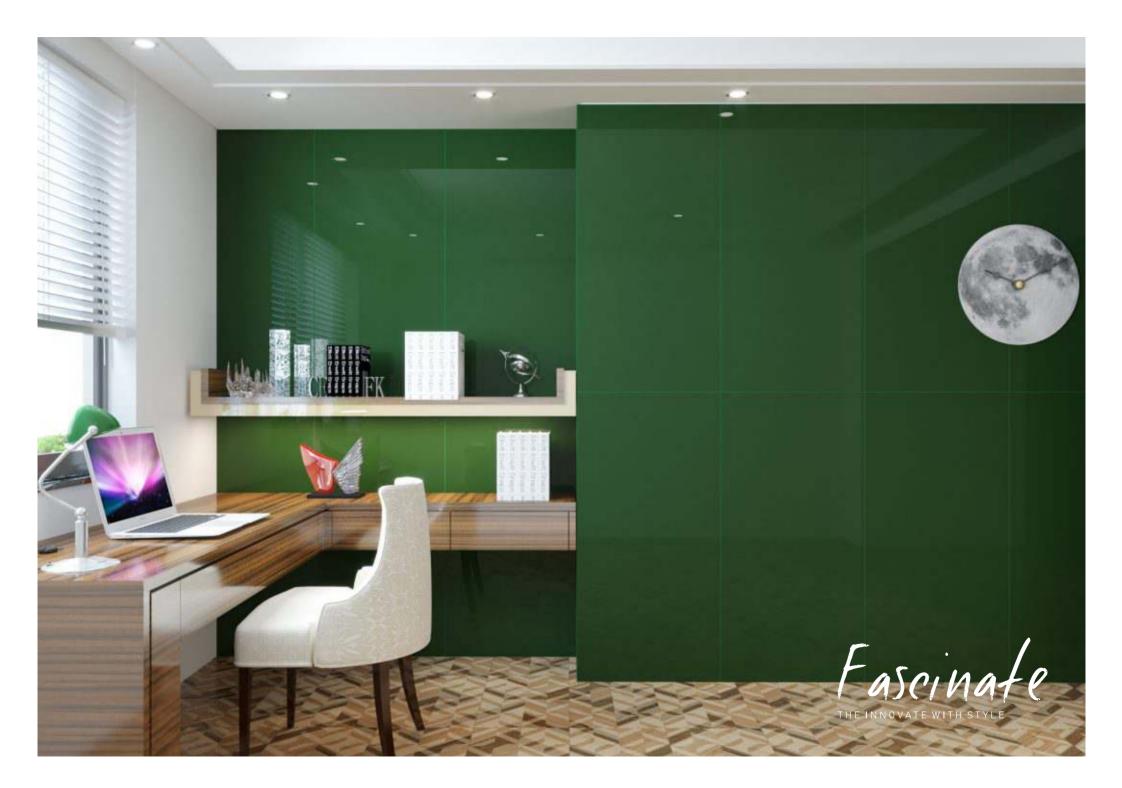



OCEAN

PGVT

600X1200MM


SURFACE GLOSSY/MATT









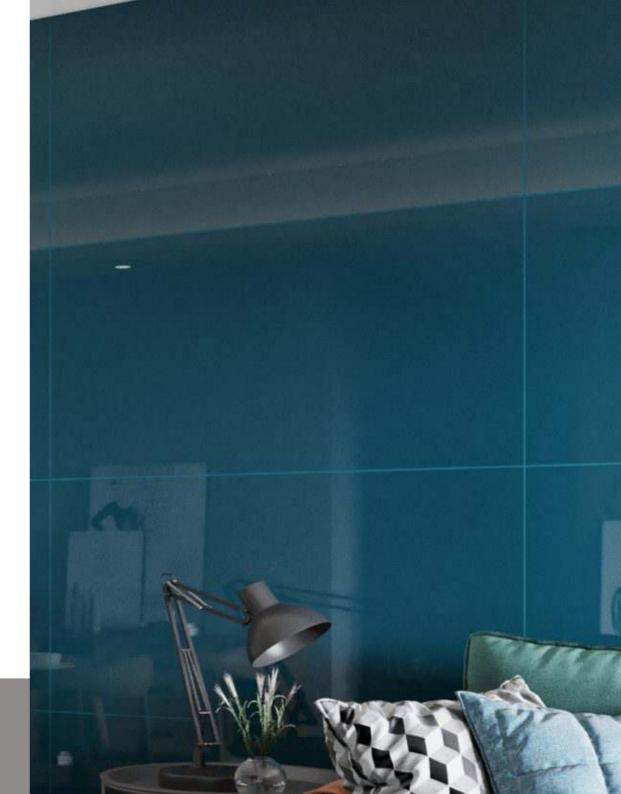





ROYAL BLUE



PGVT

600X1200MM

SURFACE GLOSSY/MATT












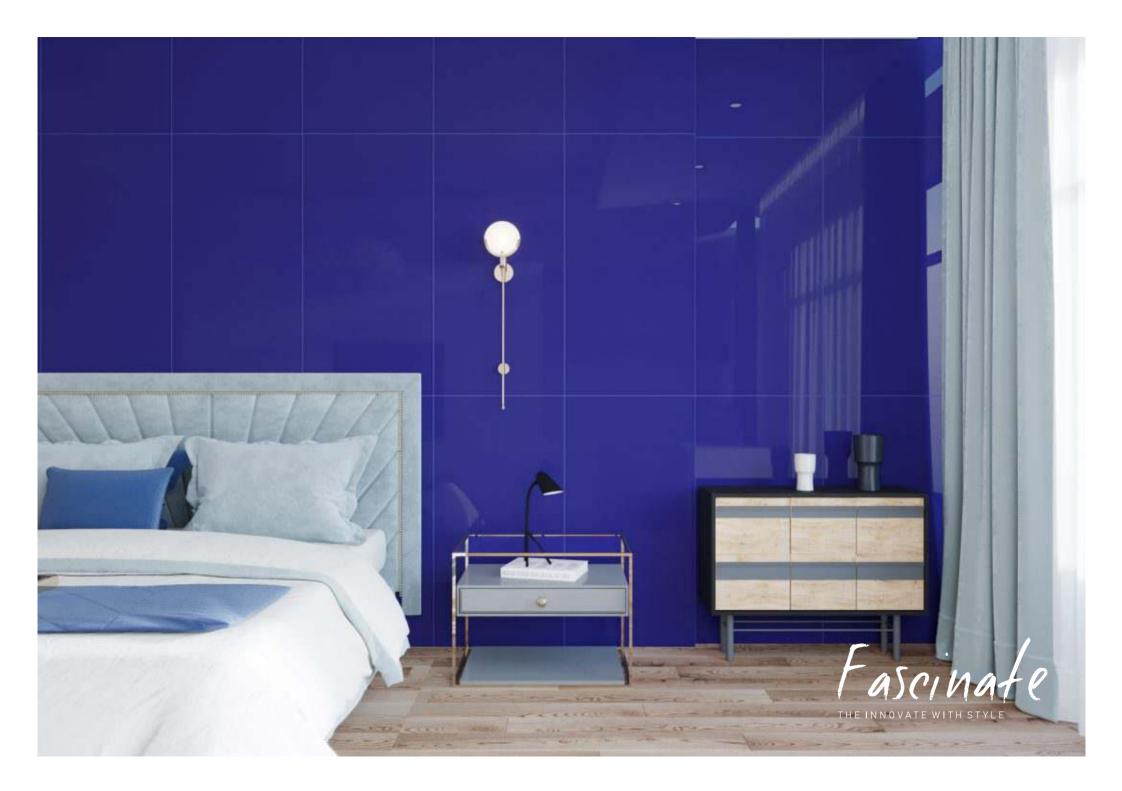

TECHNICAL SPECIFICATION

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD	VALUE
	DIMENSION & SURFAC	E QUALITY	
Deviation in length	ISO-10545-2	±0.6%	± 0.3%
Deviation in Thickness	ISO-10545-2	± 5%	± 3%
Straight of Sides	ISO-10545-2	± 0.5%	± 0.2%
Rectangularity	ISO-10545-2	± 0.5%	± 0.3%
Surface Flatness	ISO-10545-2	± 0.5%	± 0.2%
Pl	IYSICAL & THERMAL P	ROPERTIES	
Water Absorption	ISO-10545-3	2-5%	2-3%
Mohs Hardness	EN-101	Min.5	Min.5
Flexural Strength	ISO-10545-4	> 35N/mm2	> 40N/mm'
Skid Resistance (Friction Coefficient)	ISO-10545-17	> 0.4	> 0.4
Breaking Strenght	ISO-10545-11	>1113N	> 1800N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Noisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	Abrasion class shall be specified by the manufacturer	PIE IV
	CHEMICAL PROPE	RTIES	
Chemical Resistance	ISO-10545-13	No Damage No Dama	
Color Resistance	ISO-10545-16	No Damage No Dama	
Stain Resistance	ISO-10545-14	Resistant Resistant	



PACKING DETAILS

Dimension (MM)	вох				
	Pieces	Sq.Mtr.	Sq.feet	Weight (Apx.)	
600x1200MM	2	1.44	15.50	29Kgs.	



www.**durezagranito**.com

